

4 Way Ball Joint Separator - Car / LCV applications 080500V2

Universal Ball Joint Separator for Car / LCV applications.

Unique 4-way lever design allows for a wide variety of applications.

4 options are available, by removing the pin and selecting any of the 4 positions

Tapered, slim jaw fork design.

4 position, reversible lever for a wider range of application options.

Tough black epoxy coating.

Specification:

Jaw opening - 24 / 30 / 40 / 45mm options

Jaw throat width - 19mm

Jaw throat depth - 30mm



Spare parts :-

080511V2 Force Screw

080514V2 Retaining Pin

Ball Joint Separator - HGV applications 08070000

- Strong, heavy duty body, with strengthened fork and lever, allows for greater force to be applied.
- Jaw opening capacity – 70mm, jaw width 36mm.
- Can be upgraded to hydraulic power (use 08075000 Upgrade Kit).

Specification:

Jaw opening 70mm

Jaw Throat width 36mm

Jaw Throat depth 50mm

Spare Parts :-

08071170

M24 x 3.0 x 140mm Screw



Hydraulic Ball Joint Separator - HGV applications 18070000

- Hydraulic version of the 08070000 HGV ball joint separator.
- Uses hydraulic power from the SP 1500 series Hydraulic Ram.
- Provides up to 8 tonnes of hydraulic pressure.

Specification:

Jaw opening 70mm

Jaw Throat width 36mm


Jaw Throat depth 50mm

Spare parts :-

15000000 Hydraulic Power Ram

18071170 Adjusting Screw

18071270 Adjusting Plunger

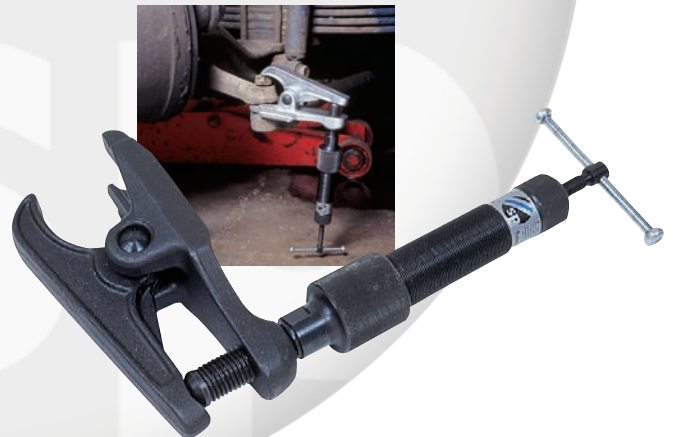

Hydraulic Upgrade Kit - for use with 08070000 HGV Ball Joint Separator 08075000

Upgrade Kit for use with 08070000 HGV Ball Joint Separator - to provide Hydraulic Power

- Uses hydraulic power from the SP 1500 series Hydraulic Ram
- Provides up to 8 tonnes of hydraulic pressure

Contents:-

15000000 Hydraulic Power Ram

18071170 Adjusting Screw

18071270 Adjusting Plunger



Ball Joint Separator - Car / LCV applications 66055000

Economy model Ball Joint Separator for Car / LCV applications.

Specification:

Jaw opening – 45mm,
Jaw Throat width - 19mm
Jaw Throat depth - 30mm

Spare parts :-
08171100 Threaded Screw




Ball Joint Separator – Car / LCV applications 66055200

- Adjustable screw c/w shear pin, allows for greater flexibility, providing a wider range of applications coverage.
- Shear pin prevents accidental overload – for safety.

Specification:

Jaw opening capacity – 45mm
Jaw width - 22mm

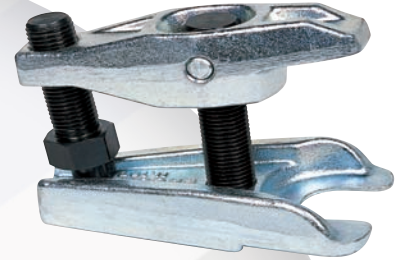

Ball Joint Separator - Direct Action Type - Car applications

66031000

Suitable for most popular car applications.

Specification:

Jaw opening capacity – 50mm
Jaw Throat width - 19mm
Jaw Throat depth - 20mm



Long Reach Ball Joint Splitter 08060000

Specification:

Length 420mm,
Jaw throat width 18mm
Jaw throat depth 68mm

Long reach professional tool, ideal for ease of access, without being restricted by wheel arches.




Ball Joint Splitter 08160000

Specification:

Length 250mm
Jaw throat width 18mm
Jaw throat depth 68mm

Standard professional tool.

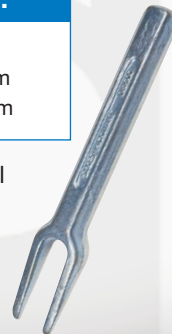

Ball Joint Splitter 66049000

Specification:

Length 195mm
Jaw throat width 15mm
Jaw throat depth 69mm

Economy model.



CV Joint Puller 08090000

CV Joint Puller

- Specialist tool for the removal of CV Joints on front wheel drive cars
- Avoids removal of the entire drive axle
- No need to use a hammer - reduce risk of damage to the drive axle
- Saves time and cost

