


## Coil Spring Compressor - Screw Type

08380000

- Set of two threaded screws with hook-type jaws, for removal of coil springs.
- Acme threaded screws for fast tightening, releasing, and safety.
- Locking screw secures jaws in place.
- Safe working load – 9000N (using both screw assemblies).
- 270mm max. jaw capacity.
- 24mm drive nut size (NB Not designed for use with air powered impact wrenches).

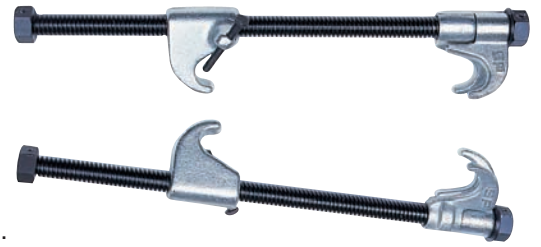

## Coil Spring Compressor - Screw Type - Set of Three (3) 08380500

As per 08380000, but set of three threaded screws and hook-type jaws

- For additional safety when working on modern high-tension springs.

NB Sykes-Pickavant recommends the use of '838' type spring compressors in sets of three ( 3) on all occasions, for added safety.



## Coil Spring Compressor - Economy model

66032000

- General purpose coil spring compressor, with helical profile hooks.
- 170mm max Jaw capacity.

( Note : 66032000 - only available whilst stocks last )



## Mini Suspension Compressor

66033000

For use on BLMC Mini's fitted with rubber cone suspension units.

- Supplied with both Metric & Imperial extension screws, to cover all applications.

Spare Parts :

08591600 Extension Screw UNF  
08591700 Extension Screw Metric



## MacPherson Strut Nut Remover Set 08920000

Set of 4 top nut sockets for popular VAG and Rover front and rear strut applications.

- Designed to hold the damper shaft in place during removal and refitting.
- 24mm hex drive.

Spare Parts :


08920170 10mm No.1 socket  
08920270 12mm No.2 socket  
08920370 14.5mm No.3 socket  
08920470 14.5mm No.4 socket



## Heavy Duty Coil Spring Compressor c/w Universal MULTIPURPOSE Jaws

08400000

- Safe Working Load 2250Kg ( 22500N )
- Supplied with 1 x pair of Universal MULTIPURPOSE Jaws
  - Patented innovative shape of jaw design fits most types and sizes of springs
  - Protective high-tech inserts in jaws for added safety
  - Jaws diameter : 80 - 200mm covers 90% of applications
- Built-in protective accessory for vice-clamping
- Large user-friendly adjusting handle for fast jaw positioning
- Overload shear-pin for safe operator use
- Range of specialist jaw options available - see below
- TUV approved
- Supplied with full Instructions and Vehicle Applications

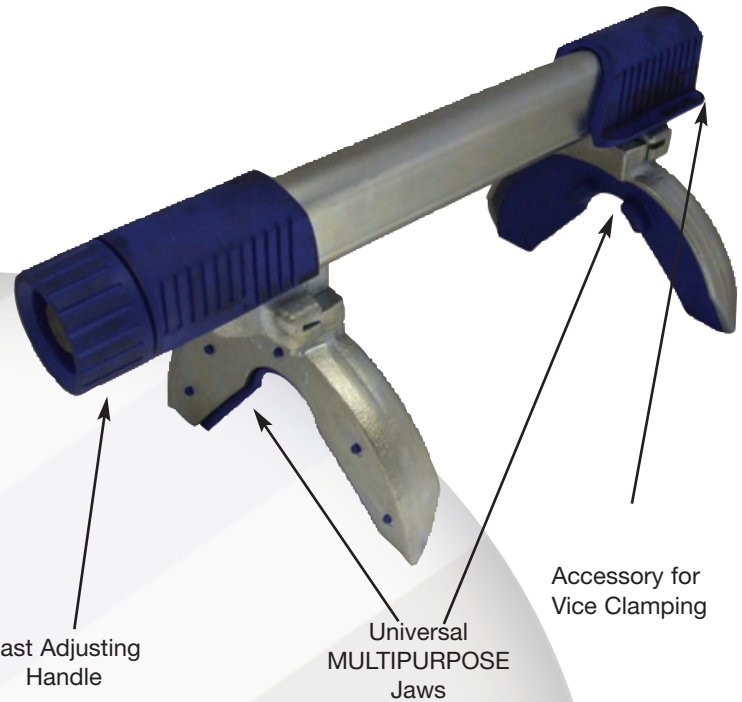

### Spare parts :-

|          |                                       |
|----------|---------------------------------------|
| 08400100 | Pair of replacement MULTIPURPOSE Jaws |
| 08402400 | Safety Shear Pin                      |

### Optional Specialist Jaws ( supplied as singles ) :

|          |   |  |
|----------|---|--|
| 08400400 | Extra Large Jaw 180 - 230mm                                 |                                       |
| 08400500 | Extra Small Jaw 80 - 120mm                                  |                                       |
| 08400600 | Jaw for Conical Springs 80 - 145mm                          |                                       |
| 08400700 | Jaw for BMW E46, E39, Renault Megane 2, Toyota Avensis      |                                       |
| 08400800 | Jaw for Mercedes C Class                                    |                                       |
| 08400900 | Jaw for Mercedes E Class, Ren Megane 2                      |                                       |
| 08401000 | Jaws for Citroen C 15, Peugeot Break ( supplied as a pair ) |                                       |
| 08401100 | Jaw for Chrysler Grand Voyager ( "counter clock" spring )   |  |

## INTERNAL COIL SPRING COMPRESSOR for Wishbone / Multi-Link Suspension

08450000

### Specially designed for vehicles fitted with front or rear wishbone suspension

- Designed to fit applications where the access hole in the lower wishbone is as small as 30mm diameter.
- Safe Working Load 2500Kg ( 25000N )
- Supplied with two pairs of specialist jaws :
  - Small angled jaws 90 - 120mm
  - Small flat jaws 60 - 120mm
  - Optional larger jaws available ( see below )
- Unique Torque Safety Key extends functionality and adds safety
  - 100Nm max torque
  - Allows for use of an Impact Wrench
- TUV approved
- Supplied with full instructions and Vehicle Applications



| Spare parts :- |                                      |
|----------------|--------------------------------------|
| 08450500       | Torque Safety Key ( 100Nm )          |
| 08451500       | Pair of small angled jaws 90 - 120mm |
| 08451800       | Pair of small flat jaws 60 - 120mm   |

### Optional Specialist Jaws ( supplied as singles ) :

|          |                               |  |
|----------|-------------------------------|--|
| 08451600 | Large angled jaws 120 - 160mm |  |
| 08451700 | Large flat jaws 120 - 140mm   |  |

### Applications :

The Internal Coil Spring Compressor, fits a wide variety of vehicles with wishbone suspension, including :-

- BMW / Citroen / Chrysler / Ford / Honda / Hyundai / Kia / Mazda / Mitsubishi
- Peugeot / Renault / Seat / Skoda / Suzuki / Toyota / Volvo / VW
  - Full Vehicle Applications are supplied with each kit
  - Applications information is also available as a download via our web-site [www.sykes-pickavant.com](http://www.sykes-pickavant.com)
- For the following models - listed below - the Internal Coil Spring Compressor is recognized as being the only recommended method of removing springs from these models

|            |                |      |      |
|------------|----------------|------|------|
| Citroen    | C1             | 06 - | Rear |
|            | C3             | 03 - | Rear |
| Kia        | Picanto        | 07 - | Rear |
| Mitsubishi | Colt           | 07 - | Rear |
| Peugeot    | 107            | 07 - | Rear |
|            | 207            | 07 - | Rear |
|            | 1007           | 07 - | Rear |
| Skoda      | Octavia        | 01 - | Rear |
|            | Roomster Scout | 08 - | Rear |
| Suzuki     | Swift          | 07 - | Rear |
|            | SX4            | 07 - | Rear |
| Toyota     | Aygo           | 07 - | Rear |
| VW         | Touran         | 03 - | Rear |

